



| | | |
|-----|------------|---------|
| 840 | O.G. HORZ. | 5600 6" |
|-----|------------|---------|

ERASE NOTE:
OUTSWING HEAD FOR SURFACE CLOSERS

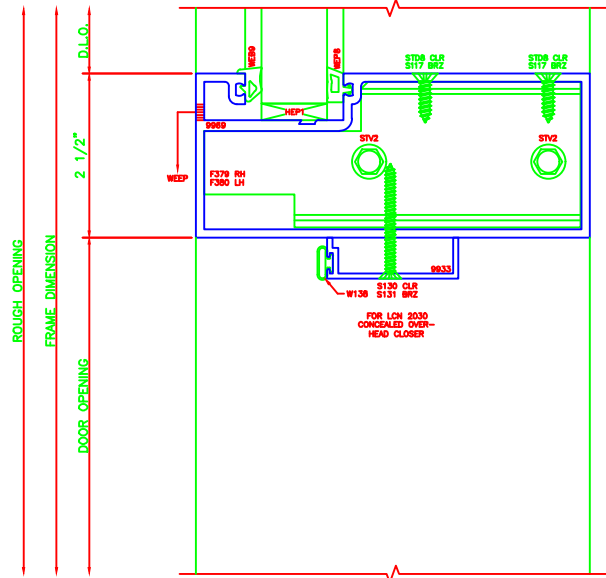


| | | |
|-----|-------------|---------|
| 827 | C.O.C. HEAD | 5600 6" |
|-----|-------------|---------|



| | | |
|-----|------------|---------|
| 841 | O.G. VERT. | 5600 6" |
|-----|------------|---------|

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6


ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK PRIOR TO SETTING MULLION IN PLACE.

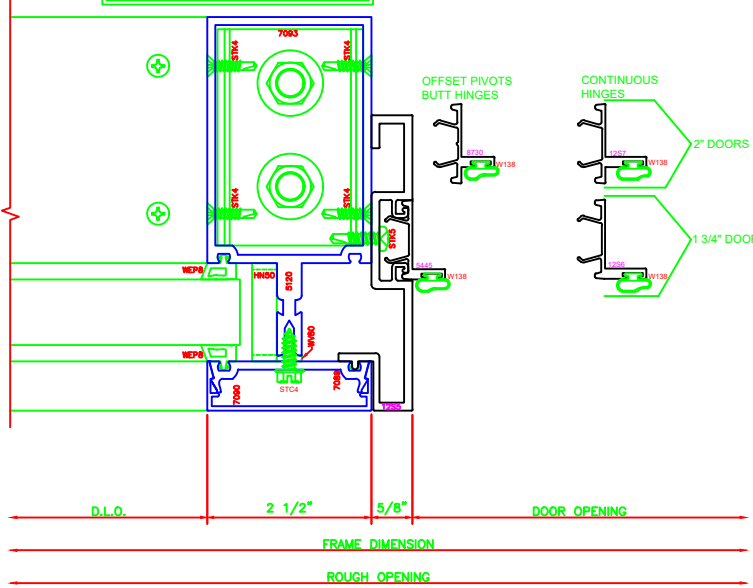

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

| | | |
|-----|------------|---------|
| 842 | O.G. VERT. | 5600 6" |
|-----|------------|---------|


ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK PRIOR TO SETTING MULLION IN PLACE.

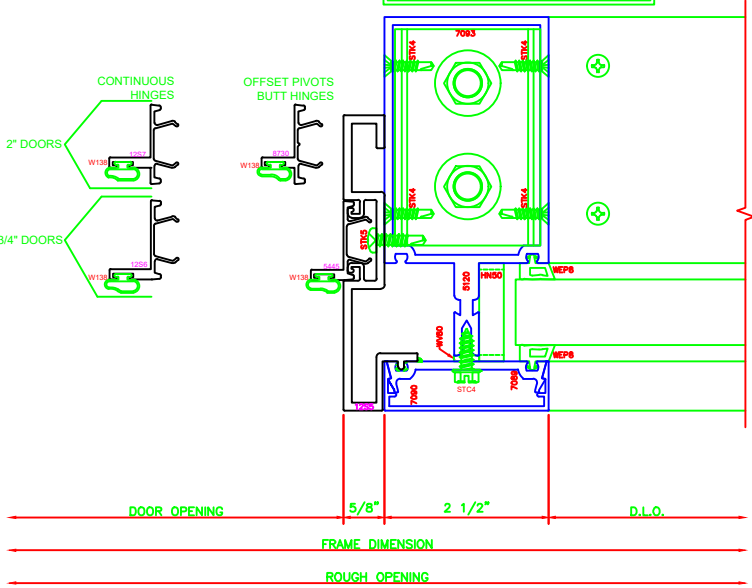

| | | |
|-----|-----------|---------|
| 838 | O.G. JAMB | 5600 6" |
|-----|-----------|---------|

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK PRIOR TO SETTING MULLION IN PLACE.

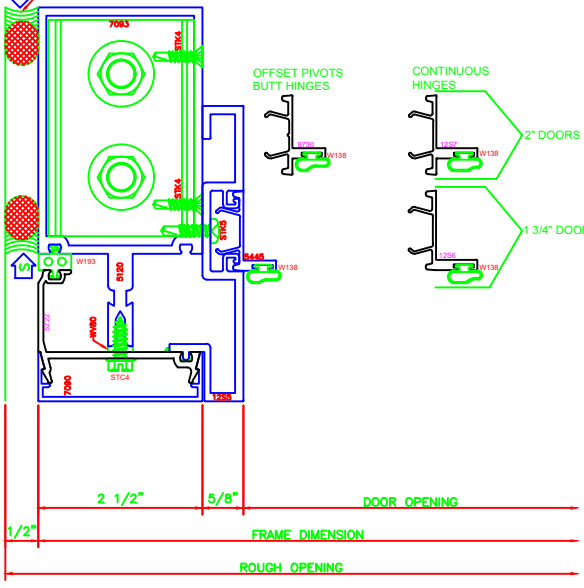

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

| | | |
|-----|-----------|---------|
| 839 | O.G. JAMB | 5600 6" |
|-----|-----------|---------|

ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK PRIOR TO SETTING MULLION IN PLACE.

