



|     |                         |
|-----|-------------------------|
| 403 | JAMB                    |
|     | 325 PROJECT OUT \ FIXED |


**ERECTOR NOTE:**  
 THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.



|     |                                      |
|-----|--------------------------------------|
| 446 | JAMB                                 |
|     | 325 FIXED \ CASEMENT OUT BUTT HINGES |




|     |                                     |
|-----|-------------------------------------|
| 444 | JAMB                                |
|     | 325 FIXED \ CASEMENT OUT 4-BAR ARMS |




|     |                                    |
|-----|------------------------------------|
| 445 | JAMB                               |
|     | 325 FIXED \ CASEMENT OUT CAM LOCKS |

|     |           |
|-----|-----------|
| 100 | HEAD      |
|     | 325 FIXED |

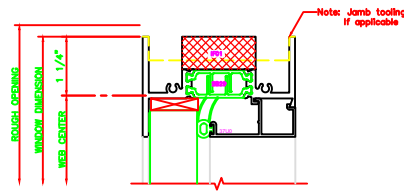


Note: Jamb Loading if applicable


|     |                                     |
|-----|-------------------------------------|
| 540 | MEETING RAIL                        |
|     | 325 FIXED \ CASEMENT OUT 4-BAR ARMS |



|     |                                      |
|-----|--------------------------------------|
| 541 | MEETING RAIL                         |
|     | 325 FIXED \ CASEMENT OUT BUTT HINGES |

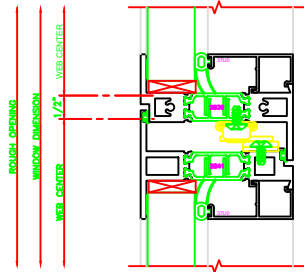


|     |                             |
|-----|-----------------------------|
| 240 | SILL                        |
|     | 325 CASEMENT OUT 4-BAR ARMS |



Note: Jamb Loading if applicable

|     |                              |
|-----|------------------------------|
| 241 | SILL                         |
|     | 325 CASEMENT OUT BUTT HINGES |



Note: Jamb Loading if applicable