




STANDARD EXTRUSION SHAPE CATALOG


STOCK ALUMINUM 90 DEGREE ANGLES

Extruded angles and channels will be assumed “outside exposed” by the finish lines, unless otherwise stated on the factory order.


| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|-------------|
| EZ19 | .050 - | 0.500 | x | 0.750 | |
| 1730 | .050 - | 0.437 | x | 1.500 | |
| 2626 | .050 - | 0.750 | x | 1.687 | |
| EX03 | .062 - | 0.500 | x | 0.500 | |
| EX22 | .062 - | 0.750 | x | 0.750 | |
| EX31 | .062 - | 1.000 | x | 1.000 | |
| EZ12 | .062 - | 0.500 | x | 1.000 | |
| EZ15 | .062 - | 1.750 | x | 3.000 | |
| EZ16 | .062 - | 0.500 | x | 2.000 | |
| EZ17 | .062 - | 0.500 | x | 1.500 | |
| EZ18 | .062 - | 0.500 | x | 1.250 | |
| EZ25 | .062 - | 2.000 | x | 2.875 | |
| 1404 | .062 - | 1.000 | x | 1.375 | |
| 1783 | .062 - | 2.500 | x | 2.500 | |
| 1791 | .062 - | 0.250 | x | 0.500 | |
| 1973 | .062 - | 1.250 | x | 2.250 | |
| 1974 | .062 - | 1.062 | x | 2.250 | |
| 2140 | .062 - | 1.500 | x | 1.500 | Radius Ends |
| 2239 | .062 - | 0.812 | x | 0.500 | |
| 5116 | .062 - | 0.250 | x | 3.000 | |
| 7611 | .070 - | 1.938 | x | 2.500 | |
| EN48 | .078 - | 1.000 | x | 5.000 | |
| 1957 | .080 - | 1.500 | x | 4.000 | |
| 20R2 | .080 - | 2.500 | x | 4.937 | |
| 1392 | .090 - | 2.000 | x | 2.000 | |
| 1882 | .090 - | 0.250 | x | 1.000 | |

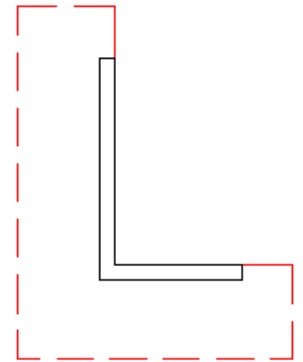

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|------------|
| EZ14 | .093 - | 1.000 | x | 1.500 | |
| 7739 | .093 - | 0.750 | x | 2.500 | .093R ENDS |
| EN98 | .125 - | 0.875 | x | 6.000 | |
| EX23 | .125 - | 1.000 | x | 1.000 | |
| EX32 | .125 - | 1.500 | x | 1.500 | |
| EX33 | .125 - | 1.000 | x | 2.000 | |
| EX67 | .125 - | 0.750 | x | 0.750 | |
| EX82 | .125 - | 1.000 | x | 1.500 | |
| EY17 | .125 - | 1.750 | x | 1.750 | |
| EY20 | .125 - | 2.000 | x | 2.000 | |
| EY26 | .125 - | 0.625 | x | 0.625 | |
| EY57 | .125 - | 0.750 | x | 1.500 | |
| EY73 | .125 - | 1.500 | x | 2.000 | |
| EY81 | .125 - | 1.000 | x | 3.000 | |
| EY88 | .125 - | 0.500 | x | 0.500 | |
| EZ01 | .125 - | 1.000 | x | 1.750 | |
| EZ09 | .125 - | 2.000 | x | 2.500 | |
| EZ10 | .125 - | 3.500 | x | 3.500 | |
| EM37 | .125 - | 3.000 | x | 3.000 | |
| 1374 | .125 - | 1.500 | x | 7.000 | |
| 1394 | .125 - | 1.000 | x | 1.250 | |
| 15W8 | .125 - | 1.187 | x | 0.625 | |
| 1777 | .125 - | 1.250 | x | 3.875 | |
| 1884 | .125 - | .750 | x | 1.000 | |
| 1894 | .125 - | .750 | x | 1.187 | |
| 1895 | .125 - | 2.375 | x | 7.250 | |
| 1966 | .125 - | .806 | x | 1.250 | |
| 1969 | .125 - | 1.500 | x | 3.562 | |
| 2132 | .125 - | 1.000 | x | 2.250 | |
| 2654 | .125 - | 1.500 | x | 1.688 | |
| 7654 | .125 - | 1.135 | x | 4.617 | |
| 9795 | .125 - | 1.000 | x | 2.750 | |
| 20R7 | .140 - | 3.500 | x | 5.625 | |
| 1919 | .156 - | 2.000 | x | 5.000 | |
| 4957 | .156 - | 1.500 | x | 8.500 | |
| 8391 | .156 - | 1.500 | x | 3.813 | |
| 8392 | .156 - | 1.250 | x | 5.500 | |

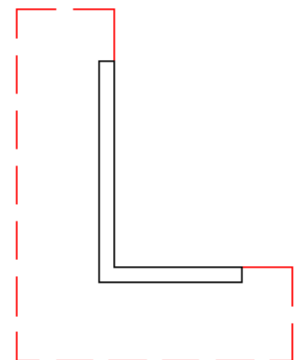


| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|----------------------|
| EX27 | .187 - | 2.000 | x | 2.000 | |
| 1708 | .187 - | 3.000 | x | 5.000 | |
| EY96 | .250 - | 3.000 | x | 3.000 | |
| 1982 | .250 - | 1.250 | x | 1.750 | |
| 2163 | .250 - | 1.250 | x | 7.750 | |
| 3477 | .250 - | 2.500 | x | 4.000 | |
| 3478 | .250 - | 1.812 | x | 4.625 | |
| 6289 | .250 - | 1.750 | x | 3.500 | |
| 35L6 | .250 - | 1.500 | x | 4.000 | |
| 8555 | .250 - | 2.062 | x | 3.187 | CHAMFERED CORNERS |
| 8744 | .250 - | 4.250 | x | 5.500 | |
| 9167 | .250 - | 1.250 | x | 1.469 | CHAMFERED CORNERS |
| 9764 | .250 - | 2.000 | x | 2.000 | |
| EZ13 | .312 - | 3.000 | x | 3.000 | |
| 11C2 | .375 - | 3.000 | x | 6.000 | |
| 8415 | .375 - | 4.250 | x | 6.000 | RADIUS CORNERS |
| EW10 | .500 - | 4.000 | x | 6.000 | |

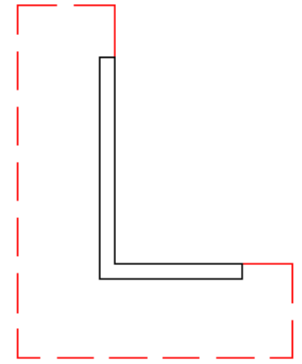

ANGLES OTHER THAN 90 DEGREES


Extruded angles and channels will be assumed “outside exposed” by the finish lines, unless otherwise stated on the factory order.

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|------|-------------|
| 1405 | .062 - | .500 | x | .500 | 125 DEGREES |
| 2426 | .100 - | .736 | x | .736 | 135 DEGREES |
| 30W4 | .125 - | .500 | x | .500 | 161 DEGREES |
| 30W5 | .125 - | .500 | x | .500 | 171 DEGREES |



ALUMINUM ANGLES WITH LEGS OF DIFFERENT WALL THICKNESS

Extruded angles and channels will be assumed “outside exposed” by the finish lines, unless otherwise stated on the factory order.



| Extrusion Number | Dimension | | | Notes |
|------------------|---------------------|---|---------------------|-------------------|
| 1909 | .125 Wall 4.500 Leg | x | .312 WALL 1.250 Leg | |
| 7781 | .156 Wall 1.250 Leg | x | .187 WALL .750 Leg | |
| 8588 | .125 Wall 1.469 Leg | x | .187 WALL .750 Leg | HAS 3 INDEX MARKS |


SERRATED SHIMS

| Extrusion Number | Dimension | | | Sides | Serration Depth |
|------------------|-----------|---|-------|---------|-----------------|
| 7083 | 0.125 | x | 1.375 | 1 Side | 0.050 |
| 7489 | 0.175 | x | 4.062 | 2 Sides | 0.050 |
| 8124 | 0.175 | x | 2.500 | 2 Sides | 0.050 |
| 8125 | 0.175 | x | 2.500 | 1 Side | 0.050 |
| 20H8 | 0.175 | x | 4.050 | 1 Side | 0.050 |
| 3386 | 0.225 | x | 3.500 | 2 Sides | 0.050 |
| 1542 | 0.270 | x | 2.000 | 1 Side | 0.050 |
| 7490 | 0.300 | x | 4.062 | 2 Sides | 0.050 |
| 7913 | 0.300 | x | 2.750 | 1 Side | 0.050 |
| 8123 | 0.300 | x | 2.500 | 2 Sides | 0.050 |




STOCK ALUMINUM EQUAL LEG CHANNELS

Extruded angles and channels will be assumed “outside exposed” by the finish lines, unless otherwise stated on the factory order.




| Extrusion Number | Thickness | Dimension | | | | Notes | |
|------------------|-----------|-----------|---|-------|---|-------|--------------|
| 18H9 | .050 - | 0.437 | x | 0.625 | x | 0.437 | |
| 1904 | .050 - | 0.312 | x | 0.590 | x | 0.312 | |
| EE92 | .062 - | 0.500 | x | 2.000 | x | 0.500 | |
| EK94 | .062 - | 0.687 | x | 0.375 | x | 0.687 | |
| EN40 | .062 - | 0.500 | x | 1.250 | x | 0.500 | |
| EP96 | .062 - | 0.937 | x | 0.500 | x | 0.937 | |
| EX08 | .062 - | 0.500 | x | 0.375 | x | 0.500 | |
| EX25 | .062 - | 0.500 | x | 0.500 | x | 0.500 | |
| 10K8 | .062 - | 0.535 | x | 0.664 | x | 0.535 | |
| 12J0 | .062 - | 0.500 | x | 1.375 | x | 0.500 | |
| 1733 | .062 - | 0.711 | x | 0.500 | x | 0.711 | |
| 2191 | .062 - | 0.436 | x | 3.000 | x | 0.436 | TAPERED LEGS |
| 7354 | .060 - | 1.187 | x | 3.282 | x | 1.187 | |
| 7355 | .062 - | 0.500 | x | 1.156 | x | 0.500 | |
| 7564 | .060 - | 0.500 | x | 1.740 | x | 0.500 | |
| 2747 | .078 - | 1.000 | x | 1.375 | x | 1.000 | |
| 1209 | .080 - | 2.080 | x | 6.375 | x | 2.080 | |
| 1278 | .080 - | 2.205 | x | 4.222 | x | 2.205 | |
| EU52 | .090 - | 0.500 | x | 3.250 | x | 0.500 | |
| 1867 | .090 - | 0.875 | x | 2.230 | x | 0.875 | |
| 2497 | .090 - | 0.750 | x | 2.000 | x | 0.750 | |
| 9493 | .090 - | 0.531 | x | 0.737 | x | 0.531 | |
| 5491 | .093 - | 0.375 | x | 0.750 | x | 0.375 | |
| 5492 | .093 - | 0.375 | x | 1.062 | x | 0.375 | |
| 8545 | .094 - | 0.875 | x | 1.225 | x | 0.875 | RADIUS LEGS |
| 4945 | .094 - | 1.000 | x | 0.625 | x | 1.000 | |






| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|---|-------|---|-------|-------------|
| EX97 | .109 - | 1.750 | x | 4.500 | x | 1.750 | |
| 33F8 | .125 - | 0.375 | x | 1.750 | x | 0.375 | |
| ES94 | .125 - | 1.000 | x | 1.375 | x | 1.000 | |
| EX06 | .125 - | 0.625 | x | 1.000 | x | 0.625 | |
| EX10 | .125 - | 1.000 | x | 2.000 | x | 1.000 | |
| EX24 | .125 - | 1.000 | x | 1.000 | x | 1.000 | |
| EX34 | .125 - | 0.500 | x | 1.250 | x | 0.500 | |
| EX36 | .125 - | 0.750 | x | 1.750 | x | 0.750 | |
| EX39 | .125 - | 1.000 | x | 1.500 | x | 1.000 | |
| EX43 | .125 - | 0.625 | x | 0.625 | x | 0.625 | |
| EX94 | .125 - | 0.500 | x | 1.000 | x | 0.500 | |
| EX98 | .125 - | 0.875 | x | 2.250 | x | 0.875 | |
| EY41 | .125 - | 1.250 | x | 1.250 | x | 1.250 | |
| EY44 | .125 - | 0.750 | x | 1.500 | x | 0.750 | |
| EY45 | .125 - | 0.750 | x | 0.750 | x | 0.750 | |
| EY48 | .125 - | 0.750 | x | 0.500 | x | 0.750 | |
| EY50 | .125 - | 0.500 | x | 1.500 | x | 0.500 | |
| EY55 | .125 - | 1.500 | x | 1.500 | x | 1.500 | |
| EY56 | .125 - | 1.500 | x | 1.250 | x | 1.500 | |
| EY59 | .125 - | 0.750 | x | 1.250 | x | 0.750 | |
| EY91 | .125 - | 0.500 | x | 0.750 | x | 0.500 | |
| EZ03 | .125 - | 1.500 | x | 4.000 | x | 1.500 | |
| EZ06 | .125 - | 1.000 | x | 0.875 | x | 1.000 | |
| 1244 | .125 - | 3.000 | x | 4.500 | x | 3.000 | |
| 12D8 | .125 - | 0.375 | x | 0.834 | x | 0.375 | |
| 1411 | .125 - | 1.000 | x | 5.000 | x | 1.000 | |
| 1505 | .125 - | 0.750 | x | 2.750 | x | 0.750 | RADIUS LEGS |
| 1898 | .125 - | 1.500 | x | 2.000 | x | 1.500 | |
| 1920 | .125 - | 1.500 | x | 2.625 | x | 1.500 | |
| 1921 | .125 - | 1.250 | x | 2.343 | x | 1.250 | |
| 19A6 | .125 - | 1.500 | x | 6.281 | x | 1.500 | |





| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|---|-------|---|-------|-------------------------|
| 20S6 | .125 - | 0.625 | x | 2.625 | x | 0.625 | |
| 20T4 | .125 - | 0.625 | x | 1.218 | x | 0.625 | |
| 20T5 | .125 - | 0.625 | x | 1.468 | x | 0.625 | |
| 20W1 | .125 - | 0.625 | x | 1.812 | x | 0.625 | |
| 2454 | .125 - | 1.250 | x | 1.000 | x | 1.250 | |
| 2611 | .125 - | 1.075 | x | 0.750 | x | 1.075 | |
| 3074 | .125 - | 1.500 | x | 1.485 | x | 1.500 | |
| 4556 | .125 - | 1.000 | x | 7.000 | x | 1.000 | |
| 4916 | .125 - | 0.783 | x | 3.220 | x | 0.783 | |
| 5216 | .125 - | 0.625 | x | 2.158 | x | 0.625 | |
| 7244 | .125 - | 3.000 | x | 6.000 | x | 3.000 | |
| 7356 | .125 - | 0.812 | x | 1.250 | x | 0.812 | |
| 7385 | .125 - | 0.750 | x | 4.085 | x | 0.750 | |
| 7608 | .125 - | 1.000 | x | 6.000 | x | 1.000 | RAD. INSIDE CORNER |
| 7769 | .125 - | 1.000 | x | 0.700 | x | 1.000 | |
| 8422 | .125 - | 1.500 | x | 1.468 | x | 1.500 | |
| 8496 | .125 - | 1.500 | x | 1.312 | x | 1.500 | |
| 9789 | .125 - | 0.375 | x | 1.000 | x | 0.375 | |
| 9995 | .125 - | 0.437 | x | 2.000 | x | 0.437 | LEGS .250 THICK |
| 22C0 | .125 - | 0.625 | x | 0.875 | x | 0.625 | |
| 30U7 | .125 - | 0.840 | x | 1.932 | x | 0.840 | |
| 8582 | .188 - | 1.250 | x | 1.970 | x | 1.250 | |
| 9076 | .188 - | 1.250 | x | 1.094 | x | 1.250 | LEGS .210 THICK |
| 14U6 | .187 - | 0.625 | x | 1.125 | x | 0.625 | LEGS .125 THICK |
| 2400 | .250 - | 1.750 | x | 1.480 | x | 1.750 | RAD. CORNERS SEE DIE |
| 3075 | .250 - | 1.500 | x | 1.735 | x | 1.500 | |
| 5322 | .250 - | 1.750 | x | 2.218 | x | 1.750 | RAD. CORNERS SEE DIE |
| 5323 | .250 - | 2.000 | x | 1.970 | x | 2.000 | RAD. CORNERS SEE DIE |






| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|--------|--------|-----|-------|-------------------------|
| | | Width | Height | Flange | Web | Depth | |
| 5936 | .250 - | 1.750 | x | 2.031 | x | 1.750 | RAD. CORNERS SEE DIE |
| 5962 | .250 - | 2.000 | x | 1.720 | x | 2.000 | RAD. CORNERS SEE DIE |
| 8493 | .250 - | 2.290 | x | 7.000 | x | 2.290 | RAD. CORNERS SEE DIE |
| 9083 | .250 - | 2.290 | x | 8.000 | x | 2.290 | TAPERED LEGS |
| 9089 | .250 - | 1.125 | x | 1.592 | x | 1.125 | LEGS .125 THICK |
| 9440 | .250 - | 0.625 | x | 1.740 | x | 0.625 | LEGS .125 THICK |
| 9441 | .250 - | 1.125 | x | 1.740 | x | 1.125 | LEGS .125 THICK |
| 4219 | .500 - | 1.750 | x | 2.500 | x | 1.750 | |


UNEQUAL LEG ALUMINUM CHANNELS - SEE DIES

Extruded angles and channels will be assumed "outside exposed" by the finish lines, unless otherwise stated on the factory order.



| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|--------|--------|-----|-------|-------|
| | | Width | Height | Flange | Web | Depth | |
| 1067 | .050 - | 0.500 | x | 0.787 | x | 1.500 | |
| 1761 | .050 - | 0.375 | x | 0.616 | x | 1.000 | |
| 9553 | .070 - | 1.454 | x | 0.949 | x | 1.334 | |
| 7537 | .080 - | 0.375 | x | 1.250 | x | 1.250 | |





| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|---|-------|---|-------|-----------------------------|
| | | | | | | | |
| EW03 | .125 - | 0.500 | x | 0.937 | x | 2.250 | |
| EW51 | .125 - | 0.406 | x | 1.500 | x | 0.354 | |
| 19V4 | .125 - | 1.000 | x | 1.375 | x | 0.562 | |
| 2534 | .125 - | 1.151 | x | 1.500 | x | 1.100 | |
| 4900 | .125 - | 0.750 | x | 2.156 | x | 0.875 | |
| 4904 | .125 - | 0.400 | x | 1.720 | x | 0.689 | |
| 4905 | .125 - | 0.400 | x | 1.720 | x | 0.875 | |
| 4907 | .125 - | 0.812 | x | 2.156 | x | 1.000 | |
| 4910 | .125 - | 0.782 | x | 2.156 | x | 1.187 | |
| 4911 | .125 - | 0.785 | x | 2.156 | x | 0.812 | |
| 4912 | .125 - | 0.688 | x | 1.720 | x | 0.874 | |
| 33F1 | .125 - | 0.500 | x | 1.563 | x | 0.813 | |
| 8888 | .125 - | 1.185 | x | 3.220 | x | 0.756 | |
| 29E3 | .125 - | 0.500 | x | 1.000 | x | 0.625 | |
| 5857 | .250 - | 0.750 | x | 3.562 | x | 1.250 | SHORT CENTER LEG SEE DIE |
| 5858 | .250 - | 0.750 | x | 4.562 | x | 1.250 | SHORT CENTER LEG SEE DIE |

STOCK ALUMINUM RECTANGULAR BARS

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|---------------------|
| | | | | | |
| 1990 | 0.050 | | x | 0.750 | .050 RADIUS CORNERS |
| 11C6 | 0.062 | | x | 2.250 | |
| 1755 | 0.062 | | x | 1.000 | |
| 27D7 | 0.062 | | x | 2.000 | |
| 1943 | 0.062 | | x | 3.625 | |
| 22B2 | 0.090 | | x | 1.250 | |



| Extrusion Number | Dimension | | | Notes |
|------------------|-----------|---|--------|---------------------|
| 13E2 | 0.100 | x | 2.250 | |
| EX21 | 0.125 | x | 1.000 | |
| EX35 | 0.125 | x | 2.000 | |
| EY02 | 0.125 | x | 0.625 | |
| EY03 | 0.125 | x | 0.750 | |
| EZ04 | 0.125 | x | 1.500 | |
| 1874 | 0.125 | x | 0.500 | |
| 3863 | 0.125 | x | 2.937 | |
| 4949 | 0.125 | x | 1.750 | |
| 7353 | 0.125 | x | 3.312 | |
| E111 | 0.187 | x | 1.000 | |
| 13E3 | 0.187 | x | 1.464 | |
| 2550 | 0.187 | x | 0.500 | |
| 3069 | 0.187 | x | 4.531 | .031 RADIUS CORNERS |
| 4381 | 0.187 | x | 1.500 | |
| 8540 | 0.188 | x | 1.750 | |
| 9166 | 0.187 | x | 1.125 | CHAMFERED CORNERS |
| 24N0 | 0.250 | x | 4.500 | |
| EY01 | 0.250 | x | 1.500 | |
| EZ11 | 0.250 | x | 0.500 | |
| EZ20 | 0.250 | x | 4.000 | |
| 1823 | 0.250 | x | 0.250 | |
| 1883 | 0.250 | x | 0.875 | |
| 2455 | 0.250 | x | 2.500 | |
| 3975 | 0.250 | x | 6.000 | |
| 9071 | 0.250 | x | 2.000 | |
| 9072 | 0.250 | x | 1.000 | |
| 9073 | 0.250 | x | 1.250 | |
| 9806 | 0.250 | x | 1.375 | |
| C050 | 0.250 | x | 3.000 | |
| 12A7 | 0.250 | x | 8.000 | |
| 19Y3 | 0.250 | x | 5.000 | |
| 1808 | 0.280 | x | 1.500 | |
| 1891 | 0.295 | x | 1.000 | |
| EP16 | 0.313 | x | 0.868 | |
| 1395 | 0.375 | x | 1.000 | |
| 3139 | 0.375 | x | 4.000 | |
| 9080 | 0.372 | x | 1.5000 | |



| Extrusion Number | Dimension | | | Notes |
|------------------|-----------|---|-------|-------------------|
| 3128 | 0.438 | x | 0.750 | |
| 1397 | 0.500 | x | 0.750 | RADIUS ENDS |
| 1758 | 0.500 | x | 2.000 | |
| 1887 | 0.500 | x | 6.000 | |
| 8140 | 0.500 | x | 0.625 | .031 R CORNERS |
| 8715 | 0.500 | x | 1.250 | BEVELED 2 CORNERS |
| 8726 | 0.500 | x | 1.250 | |
| 16N8 | 0.500 | x | 1.438 | |
| 9084 | 0.500 | x | 2.000 | |
| 9927 | 0.625 | x | 0.875 | |
| 4435 | 0.625 | x | 3.375 | |
| 4436 | 0.625 | x | 1.125 | |
| 16R6 | 0.625 | x | 1.438 | |
| 16R7 | 0.718 | x | 1.438 | |
| EX05 | 0.750 | x | 1.750 | |
| 14M7 | 0.750 | x | 8.000 | |
| 1856 | 0.750 | x | 3.000 | |
| 16R8 | 0.750 | x | 1.438 | |
| 34T5 | 0.750 | x | 2.500 | |
| 16S1 | 0.812 | x | 1.438 | .156 RADIUS (4) |
| 2737 | 1.000 | x | 3.000 | |
| 16R9 | 1.125 | x | 1.438 | .312 RADIUS (4) |
| 1782 | 1.250 | x | 2.000 | |
| 16S0 | 1.312 | x | 1.438 | |
| 1976 | 1.500 | x | 6.000 | |
| 2741 | 1.500 | x | 1.500 | |
| EX01 | 1.750 | x | 2.500 | |
| 4947 | 1.750 | x | 5.000 | |
| 3849 | 2.500 | x | 5.000 | |

STOCK ALUMINUM ROUND BARS

| Extrusion Number | Dimension | Notes |
|------------------|----------------|-------|
| C047 | 0.500 DIAMETER | |



STOCK ALUMINUM SQUARE OR RECTANGULAR TUBES

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|-------|
| 1753 | .050 - | 0.625 | x | 0.875 | |
| 1756 | .062 - | 0.647 | x | 0.647 | |
| 1836 | .065 - | 0.875 | x | 0.875 | |
| 1857 | .062 - | 0.438 | x | 3.625 | |
| 3215 | .062 - | 1.266 | x | 1.408 | |
| C081 | .062 - | 1.000 | x | 1.500 | |
| CO45 | .064 - | 1.000 | x | 1.000 | |
| 15G3 | .070 - | 1.500 | x | 0.700 | |
| 1714 | .080 - | 1.000 | x | 2.000 | |
| 9113 | .080 - | 1.750 | x | 4.500 | |
| 9213 | .080 - | 2.000 | x | 4.500 | |
| 9909 | .080 - | 1.000 | x | 1.000 | |
| 9910 | .080 - | 1.750 | x | 1.750 | |
| 9911 | .080 - | 2.000 | x | 2.000 | |
| 1962 | .090 - | 1.250 | x | 4.000 | |
| 30N1 | .094 - | 0.750 | x | 4.000 | |
| 2689 | .094 - | 0.750 | x | 1.250 | |
| 12P4 | .100 - | 1.000 | x | 3.000 | |
| 19B0 | .100 - | 1.937 | x | 4.250 | |
| 19B1 | .100 - | 1.710 | x | 4.424 | |
| 19B2 | .100 - | 1.710 | x | 5.800 | |
| 19B3 | .100 - | 1.960 | x | 6.424 | |
| 19B4 | .100 - | 2.200 | x | 5.300 | |
| 19B5 | .100 - | 2.200 | x | 4.438 | |
| 4967 | .100 - | 2.187 | x | 4.547 | |
| 4968 | .100 - | 2.187 | x | 4.406 | |
| 4969 | .100 - | 2.187 | x | 5.281 | |
| 4970 | .100 - | 2.187 | x | 3.297 | |
| 4971 | .100 - | 2.187 | x | 4.797 | |
| 4972 | .100 - | 1.937 | x | 3.312 | |
| 4974 | .100 - | 1.750 | x | 3.454 | |
| 4975 | .100 - | 2.187 | x | 5.406 | |
| 5883 | .100 - | 1.976 | x | 3.456 | |
| 5918 | .100 - | 1.960 | x | 4.400 | |
| 5978 | .100 - | 1.960 | x | 3.330 | |



| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|---------|
| EK91 | .125 - | 0.625 | x | 1.000 | |
| EU69 | .125 - | 1.500 | x | 5.000 | |
| EW09 | .125 - | 2.250 | x | 5.000 | |
| EX59 | .125 - | 2.000 | x | 3.000 | |
| 28H7 | .125 - | 1.500 | x | 6.000 | |
| EX60 | .125 - | 2.000 | x | 6.000 | |
| EX61 | .125 - | 1.250 | x | 1.250 | |
| EX72 | .125 - | 2.000 | x | 2.000 | |
| EX85 | .125 - | 1.500 | x | 1.500 | |
| EX96 | .125 - | 1.750 | x | 4.000 | |
| EY13 | .125 - | 1.500 | x | 2.000 | |
| EY30 | .125 - | 1.750 | x | 3.000 | |
| EY51 | .125 - | 1.750 | x | 1.750 | |
| EY54 | .125 - | 1.000 | x | 1.000 | |
| EY71 | .125 - | 2.000 | x | 5.000 | |
| EY83 | .125 - | 3.000 | x | 3.000 | |
| EZ07 | .125 - | 1.750 | x | 4.500 | |
| EZ08 | .125 - | 2.000 | x | 4.000 | |
| EZ23 | .125 - | 4.500 | x | 4.500 | |
| EZ24 | .125 - | 3.000 | x | 4.000 | |
| 10C0 | .125 - | 4.500 | x | 6.000 | |
| 10V6 | .125 - | 0.750 | x | 1.062 | |
| 12A4 | .125 - | 5.000 | x | 6.250 | |
| 13A5 | .125 - | 2.500 | x | 6.521 | |
| 1396 | .125 - | 2.500 | x | 2.500 | |
| 1774 | .125 - | 2.750 | x | 3.500 | |
| 34TS | .125 - | 0.750 | x | 2.500 | |
| 1814 | .125 - | 1.312 | x | 5.500 | |
| 1863 | .125 - | 4.000 | x | 5.500 | |
| 1869 | .125 - | 2.500 | x | 5.000 | |
| 1917 | .125 - | 1.375 | x | 3.250 | |
| 1946 | .125 - | 1.000 | x | 2.000 | |
| 1985 | .125 - | 2.500 | x | 3.000 | |
| 2131 | .125 - | 1.500 | x | 2.875 | |
| 2556 | .125 - | 2.000 | x | 4.500 | |
| 2713 | .125 - | 0.750 | x | 1.500 | |
| 5099 | .125 - | 1.960 | x | 5.445 | SEE DIE |



| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|---------|
| 5403 | .125 - | 2.500 | x | 5.750 | |
| 7113 | .125 - | 3.000 | x | 3.875 | SEE DIE |
| 7531 | .125 - | 2.000 | x | 6.750 | |
| 7538 | .125 - | 1.750 | x | 6.750 | |
| 7873 | .125 - | 4.000 | x | 4.000 | |
| 7954 | .125 - | 4.000 | x | 5.000 | |
| 8436 | .125 - | 2.000 | x | 3.281 | |
| 8641 | .125 - | 2.250 | x | 4.500 | |
| 9111 | .125 - | 1.000 | x | 4.500 | |
| 9861 | .125 - | 0.500 | x | 1.750 | |
| 9863 | .125 - | 1.750 | x | 5.750 | |
| 9864 | .125 - | 2.000 | x | 5.750 | |
| 28H7 | .125 - | 1.500 | x | 6.000 | |
| 2905 | .156 - | 1.750 | x | 7.000 | |
| 4960 | .156 - | 5.000 | x | 6.000 | |
| 4973 | .156 - | 2.125 | x | 7.485 | |
| 1924 | .187 - | 4.000 | x | 6.000 | |
| 1947 | .187 - | 3.000 | x | 6.000 | |
| 6141 | .187 - | 2.500 | x | 6.375 | |

STOCK ALUMINUM ROUND TUBES

| Extrusion Number | Thickness | Dimension | Notes |
|------------------|-----------|----------------|-------|
| 9929 | .050 - | 1.000 DIAMETER | |
| 8906 | .055 - | .750 DIAMETER | |
| 1835 | .056 - | .625 DIAMETER | |
| 15Y7 | .062 - | .514 DIAMETER | |
| 15Y8 | .062 - | .389 DIAMETER | |
| 1865 | .075 - | .750 DIAMETER | |
| 16D7 | .080 - | .540 DIAMETER | |
| EOOX | .125 - | 1.500 DIAMETER | |
| 1718 | .250 - | 3.000 DIAMETER | |
| 39X0 | .065 - | 1.500 DIAMETER | |
| 39X8 | .065 - | 2.000 DIAMETER | |
| 39X9 | .125 - | 2.000 DIAMETER | |
| 39Y0 | .065 - | 2.500 DIAMETER | |



| Extrusion Number | Thickness | Dimension | Notes |
|------------------|-----------|----------------|-------|
| 39Y1 | .125 - | 2.500 DIAMETER | |
| 39Y2 | .065 - | 3.000 DIAMETER | |
| 39W9 | .125 - | 3.000 DIAMETER | |

F - ALUMINUM EXTRUSIONS

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|------------|-----------|---|-------|
| 1885 | .062 - | .500 LEG, | .500 LEG | x | 1.125 |
| 5880 | .094 - | .236 LEG, | .236 LEG | x | 1.688 |
| 1850 | .125 - | .375 LEG, | .375 LEG | x | 3.250 |
| 1912 | .125 - | 1.125 LEG, | 1.125 LEG | x | 3.438 |
| 4987 | .125 - | .875 LEG, | .875 LEG | x | 4.000 |
| 5233 | .125 - | .875 LEG, | .875 LEG | x | 3.438 |
| 5734 | .125 - | .875 LEG, | .875 LEG | x | 4.000 |

T - ALUMINUM EXTRUSIONS

| Extrusion Number | Thickness | Dimension | | | Notes |
|------------------|-----------|-----------|---|-------|-------|
| 1591 | .187 - | 3.000 | x | 2.250 | |
| 6290 | .250 - | 2.750 | x | 2.125 | |



90 DEGREE Z - ALUMINUM EXTRUSIONS

| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|---|-------|---|-------|----------------|
| 7912 | .062 - | 1.00 | x | 0.688 | x | 1.688 | |
| 29W0 | .100 - | 1.375 | x | 0.781 | x | 1.116 | |
| 1422 | .125 - | 1.000 | x | 0.812 | x | 2.187 | |
| 1770 | .125 - | 0.937 | x | 0.937 | x | .937 | RADIUS ONE END |
| 3875 | .125 - | 0.750 | x | 0.609 | x | 1.500 | |
| 7916 | .125 - | 1.250 | x | 0.373 | x | 2.125 | |
| 9439 | .125 - | 0.625 | x | 0.250 | x | 1.375 | |
| 10B7 | .250 - | 2.282 | x | 2.062 | x | 2.282 | |
| 29T7 | .250 - | 3.000 | x | 5.375 | x | .750 | |

Z - ALUMINUM EXTRUSIONS OTHER THAN 90 DEGREES

| Extrusion Number | Thickness | Dimension | | | | | Notes |
|------------------|-----------|-----------|---|-------|---|-------|-------|
| 2822 | .125 - | 0.750 | x | 0.375 | x | 0.750 | |
| 7277 | .125 - | 1.125 | x | 0.563 | x | 2.625 | |

80/20 T-SLOTS

| Extrusion Number | Dimension | Notes |
|------------------|--|-------|
| 39S9 | 1.5" x 1.5" T-SLOT BAR | |
| 40Q9 | E7998 1.5" 80/20 T-SLOT SQUARE | |
| 40R0 | E7999 1.5" x 3.0" RECTANGLE 80/2- T-SLOT | |

